


全自動純化系統

(主動式監測溶液、多種偵測器、自動收集、自動管柱辨識)

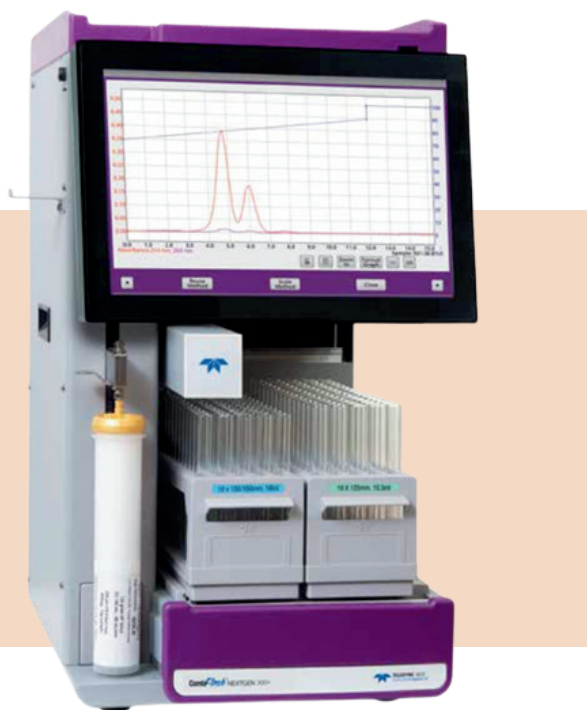

COMBI Flash[®]
NEXTGEN 300+

產品特點

- 壓力上限：300 psi
- 流速範圍：1 ~ 300 ml/min
- 樣品偵測：UV/Vis (200-800 nm)、ELSD、Mass
- 溶劑梯度：可選擇 3 種溶劑搭配使用
- 常用管柱：正逆相皆可，最多可配置 750 g column
- 操作介面：人性化設置且一鍵控制

RediSep Gold Columns

- 20-40 μ m Spherical
- Load More
- High Purity
- Greener/Faster Separation



Decreasing RediSep Media Polarity

Normal Phase Silica, Alumina	Si-OH , Al_2O_3
Amine	$\text{Si-O-CH}_2\text{CH}_2\text{CH}_2\text{NH}_2$
C8	$\text{Si-O-CH}_2\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_3$
C18/18Aq	$\text{Si-O-CH}_2\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_2\text{CH}_3$

Stationary Phase Media

Large Column Adapter



Adds support for 750 g, 1.5 kg, and 3.0 kg columns (sizes based on silica capacity)

Solid Load Cartridges

